


BESSEY® Product Training



BESSEY® Tools North America
Edge Clamps

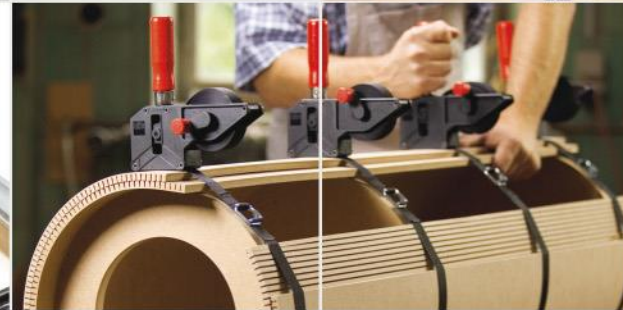

Edge Clamps: KT5-1 and 5-2



Simply better.

Quickly convert **BESSEY®** malleable cast & most other standard bar clamps to 3-way edge clamps.

- ❑ BESSEY models KT5-1 and 5-2
- ❑ Works with rail thickness up to ½”.
- ❑ Great for edge gluing wood trim to table & counter tops.
- ❑ 5-1 are firmly held in place on the rail of the sliding arm clamp with a thumbscrew.
- ❑ 5-2 are held in place by the pressure being exerted against the work piece.
- ❑ Dual spindles on the 5-2 are great for pushing thick mouldings onto curved edges.



Edge Clamps: EKT-55



Simply better.

Quick & easy one-handed operation

1. Unique twin spindle design
 - Outer spindle acts on the square clamping jaws – inner spindle with round pad.
2. Square clamping jaws
 - Large soft jaws for gentle, slip resistant, non-marring grip.
3. Round swivel pad
 - With non-marring plastic cover applies pressure to edging material
4. Aluminum housing
 - Strong & lightweight, designed for many years of service.



Edge Clamps: EKT-55



Simply better.


Unique dual action spindle for quick & easy one-handed operation

- ❑ As the handle turns the spindle advances
- ❑ When the round pressure is engaged the jaws close against the edging
- ❑ A true one-handed clamp
- ❑ Max. clamping pressure is 500 lbs.
- ❑ Max. table/countertop thickness 2-1/8"



LIGHTWEIGHT
ALUMINUM FRAME

LARGE JAWS
SOFT NON-SLIP
PADS

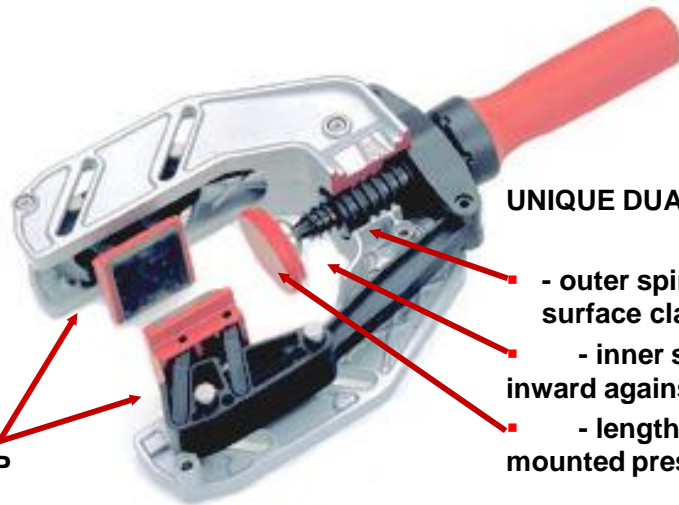

UNIQUE DUAL ACTION SPINDLE


- outer spindle activates surface clamping arms
- inner spindle pushes inward against the edge
- length of travel for swivel mounted pressure pad is 1-3/4"

Edge Clamps: KF Series




Simply better.

- ❑ Easy to use one-handed operation.
- ❑ Spring loaded jaws automatically clamp on to work piece
- ❑ Comfortable, ergonomically shaped wood handle.
- ❑ 2 models available
 - KF2 - with 3" throat depth & max work piece thickness is 2"
 - KF4 - with 4-1/3" throat depth & max work piece thickness is 3"
- ❑ Minimum thickness for work piece is 1/2" for both models.

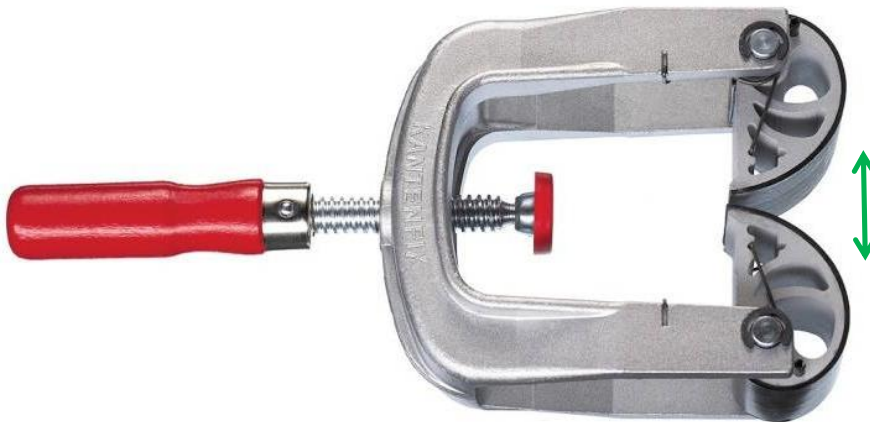

work piece thickness

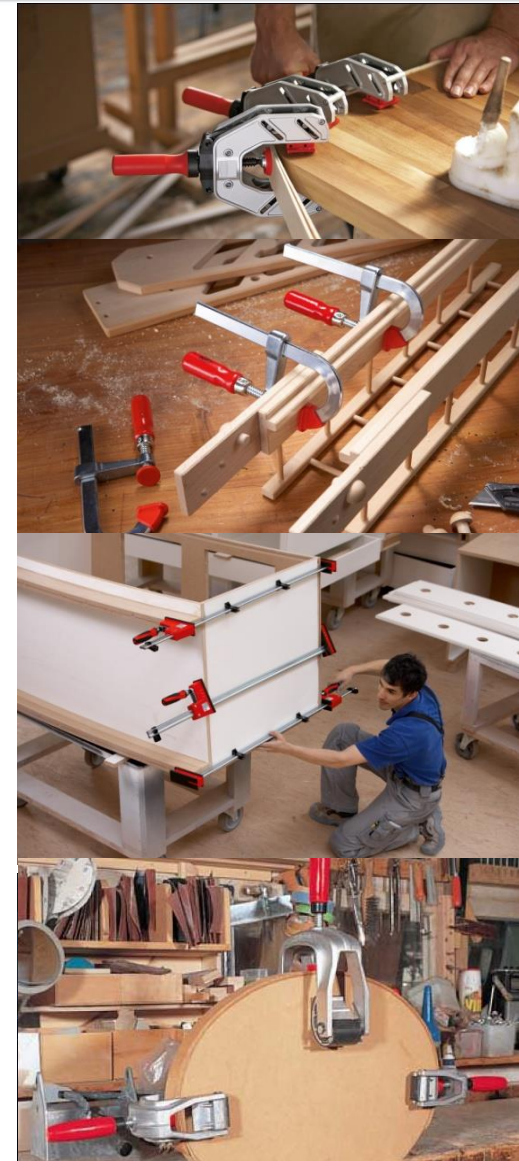


Edge Clamps: B-EC3



Simply better.

Light duty malleable cast “C” frame with three independently adjustable spindles.

- ❑ Nominal throat depth is 2-½”
- ❑ Nominal clamping capacity is 2-½”
- ❑ Load limit 300 lbs

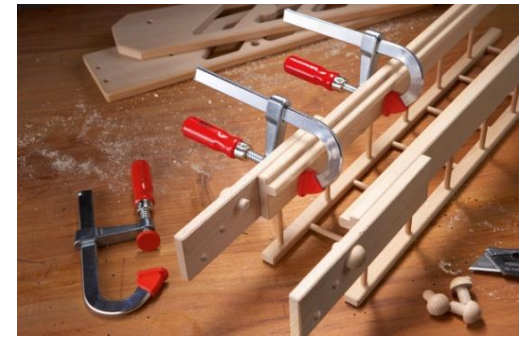

Thank you for your attention!

BESSEY® Tools North America